

HARMONIC AND RANDOM VIBRATIONS OF ANISOTROPIC BEAM

Petr E. Tovstik¹, Tatiana M. Tovstik¹, and Natalia V. Naumova²

¹St. Petersburg State University, Mathematics and Mechanics Faculty. 198504, Universitetsky pr., 28,
Sary Peterhof, Russia.
e-mail: peter.tovstik@mail.ru

² St. Petersburg State University. e-mail: n.v.naumova@spbu.ru

Keywords: anisotropic beam, equations of second order accuracy, forced harmonic and random vibrations.

Abstract. *Vibrations of a thin elastic beam-strip are studied. A beam is made of an anisotropic material heterogeneous in the thickness direction. The 1D model of second-order accuracy is delivered by using asymptotic expansions in powers of the relative beam thickness. A special attention is paid to the slanted anisotropy with 6 elastic modules. A spectrum of bending vibrations in the case of simply supported ends of a beam is constructed. Forced vibrations under action of a harmonic and a random excitations are studied. In the last case, the root-mean-square of deflections are found in dependence of a type of excitation.*

1 INTRODUCTION

In this work vibrations of a thin elastic beam (strip) made of an anisotropic material heterogeneous in the thickness direction are studied. The 1D model of second-order accuracy is put forwards using asymptotic expansions in powers of the relative beam thickness. A lot of investigations are devoted to obtaining approximate equations describing beams, plates and shells deformations. For homogeneous isotropic material the well-known Kirchhoff–Love and Timoshenko–Reissner models may be used. For anisotropic materials with a general anisotropy (with 21 elastic modules) the additional difficulties arise [1, 2, 3, 4, 5]. The more exact equations of second-order accuracy for beams and plates made of a transversely isotropic heterogeneous (or multi-layered) material were constructed in [6, 7, 8, 9]. In the case of the general anisotropy the construction of models of second-order accuracy is more difficult. In [10] such a model for an infinite long-waved beam vibrations and waves was constructed.

In the present paper the same problem is solved for a beam with finite length and simply supported edges. Forced harmonic and random vibrations are studied. The effects of general anisotropy are discussed.

2 THE MAIN EQUATIONS AND ASSUMPTIONS

A linear plane dynamic problem for a multi-layered anisotropic beam-strip of constant thickness h and length L is studied. A system of equations is as follows:

$$\frac{\partial \sigma_{11}}{\partial x} + \frac{\partial \sigma_{13}}{\partial z} - \rho \frac{\partial^2 u}{\partial t^2} + f_1(x, z, t) = 0, \quad \frac{\partial \sigma_{13}}{\partial x} + \frac{\partial \sigma_{33}}{\partial z} - \rho \frac{\partial^2 w}{\partial t^2} + f_3(x, z, t) = 0, \quad (1)$$

where x, z are the Cartesian co-ordinates ($0 \leq x \leq L, 0 \leq z \leq h$), t is the time, σ_{ij} are the stresses, f_1, f_3 are the projections of the external body load intensity, $u(x, z, t), w(x, z, t)$ are the deflection projections on the x - and z -directions, respectively, $\rho = \rho(z)$ is the material density (Fig. 1).




Figure 1: A beam.

The planes $z = 0$ and $z = h$ are free, that leads to the boundary conditions

$$\sigma_{13}(x, z, t) = \sigma_{33}(x, z, t) = 0, \quad z = 0, h. \quad (2)$$

In the case of general anisotropy, the elasticity relations read as

$$\begin{aligned} \sigma_{11} &= E_{11}\varepsilon_{11} + H_1\varepsilon_{13} + E_{13}\varepsilon_{33}, \\ \sigma_{13} &= H_1\varepsilon_{11} + G_{13}\varepsilon_{13} + H_3\varepsilon_{33}, \\ \sigma_{33} &= E_{13}\varepsilon_{11} + H_3\varepsilon_{13} + E_{33}\varepsilon_{33}, \end{aligned} \quad \mathbf{E} = \begin{pmatrix} E_{11} & H_1 & E_{13} \\ H_1 & G_{13} & H_3 \\ E_{13} & H_3 & E_{33} \end{pmatrix}, \quad (3)$$

$$\varepsilon_{11} = \frac{\partial u}{\partial x}, \quad \varepsilon_{13} = \frac{\partial u}{\partial z} + \frac{\partial w}{\partial x}, \quad \varepsilon_{33} = \frac{\partial w}{\partial z}, \quad (4)$$

where ε_{ij} are the strains.

Assume that the modules of elasticity in Eqs. (3) and the density ρ are independent of x , but they may depend on z . Therefore, the multilayered beams and the beams made of functionally graded material are not excluded from consideration. The matrix \mathbf{E} is supposed to be positively definite.

From Eqs. (3) we have

$$\begin{aligned}\varepsilon_{33} &= c_3 \sigma_{33} - c_\nu \varepsilon_{11} - c_1 \varepsilon_{13}, \\ \varepsilon_{13} &= -c_h \varepsilon_{11} + c_g \sigma_{13} - c_1 \sigma_{33}, \\ \sigma_{11} &= c_0 \varepsilon_{11} + c_h \sigma_{13} + c_\nu \sigma_{33},\end{aligned}\tag{5}$$

where

$$\begin{aligned}c_0 &= E_{11} - \frac{E_{13}^2 G_{13} - 2H_1 H_3 E_{13} + H_1^2 E_{33}}{\Delta_1} = \frac{\Delta}{\Delta_1} > 0, \quad \Delta_1 = G_{13} E_{33} - H_3^2 > 0, \\ c_3 &= \frac{G_{13}}{\Delta_1}, \quad c_1 = \frac{H_3}{\Delta_1}, \quad c_h = \frac{E_{33} H_1 - E_{13} H_3}{\Delta_1}, \quad c_\nu = \frac{E_{13} G_{13} - H_1 H_3}{\Delta_1}, \quad c_g = \frac{E_{33}}{\Delta_1},\end{aligned}\tag{6}$$

and $\Delta > 0$ is the determinant of the matrix \mathbf{E} .

The main unknowns in Eqs. (1), (3) are $w, u, \sigma_{13}, \sigma_{33}$. According to Eqs. (5) they satisfy the system:

$$\begin{aligned}\frac{\partial w}{\partial z} &= -c_\nu \frac{\partial u}{\partial x} - c_1 \sigma_{13} + c_3 \sigma_{33}, \\ \frac{\partial u}{\partial z} &= -\frac{\partial w}{\partial x} - c_h \frac{\partial u}{\partial x} + c_g \sigma_{13} - c_1 \sigma_{33}, \\ \frac{\partial \sigma_{13}}{\partial z} &= -c_0 \frac{\partial^2 u}{\partial x^2} - c_h \frac{\partial \sigma_{13}}{\partial x} - c_\nu \frac{\partial \sigma_{33}}{\partial x} + \rho \frac{\partial^2 u}{\partial t^2} - f_1(x, z, t), \\ \frac{\partial \sigma_{33}}{\partial z} &= -\frac{\partial \sigma_{13}}{\partial x} + \rho \frac{\partial^2 w}{\partial t^2} - f_3(x, z, t).\end{aligned}\tag{7}$$

We introduce the dimensionless variables (with the hat-sign):

$$\begin{aligned}\{u, w, z\} &= h\{\hat{u}, \hat{w}, \hat{z}\}, \quad \{\sigma_{ij}, E_{ij}, G_{13}, H_i, c_0\} = E_0\{\hat{\sigma}_{ij}, \hat{E}_{ij}, \hat{G}_{13}, \hat{H}_i, \hat{c}_0\}, \\ x &= L\hat{x}, \quad \{c_1, c_3, c_g\} = \frac{1}{E_0}\{\hat{c}_1, \hat{c}_3, \hat{c}_g\}, \quad \rho = \rho_0 \hat{\rho}, \quad t = T\hat{t}, \quad \mu = \frac{h}{L}, \\ \{f_1, f_3\} &= \frac{E_0}{h}\{\hat{f}_1, \hat{f}_3\}, \quad E_0 = \frac{1}{h} \int_0^h c_0(z) dz, \quad \rho_0 = \frac{1}{h} \int_0^h \rho(z) dz, \quad T = \sqrt{\frac{\rho_0 L^4}{E_0 h^2}}.\end{aligned}\tag{8}$$

Here, E_0, ρ_0 are the average values of the equivalent longitudinal stresses c_0 and of material density. The dimensionless time \hat{t} is introduced so that the minimal natural frequency is of the order of unity, μ is the small thickness parameter. Further we omit the hat-sign.

In particular, for a beam made of an orthotropic material in the dimensionless notation we get:

$$H_1 = H_3 = 0, \quad c_1 = c_h = 0, \quad c_0 = E_{11} - \frac{E_{13}^2}{E_{33}}, \quad c_g = \frac{1}{G_{13}}, \quad c_\nu = \frac{E_{13}}{E_{33}}, \quad c_3 = \frac{1}{E_{33}}\tag{9}$$

and for an isotropic material:

$$c_0 = \frac{E}{E_0(1 - \nu^2)}, \quad c_g = \frac{2(1 + \nu)E_0}{E}, \quad c_\nu = \frac{\nu}{1 - \nu}, \quad c_3 = \frac{E_0(1 - 2\nu)(1 + \nu)}{E(1 - \nu)}, \quad (10)$$

where $E(z), \nu(z)$ are, respectively, the Young modulus and the Poisson ratio.

If $H_1 \neq 0$ and/or $H_3 \neq 0$, we have the slanted anisotropy with $c_1 \neq 0$ and/or $c_h \neq 0$. In the opposite case the material is orthotropic or isotropic.

In the dimensionless variables the boundary-value problem (7), (2) is written as:

$$\begin{aligned} \frac{\partial w}{\partial z} &= -\mu c_\nu \frac{\partial u}{\partial x} - c_1 \sigma_{13} + c_3 \sigma_{33}, \\ \frac{\partial u}{\partial z} &= -\mu \frac{\partial w}{\partial x} - \mu c_h \frac{\partial u}{\partial x} + c_g \sigma_{13} - c_1 \sigma_{33}, \\ \frac{\partial \sigma_{13}}{\partial z} &= -\mu^2 c_0 \frac{\partial^2 u}{\partial x^2} - \mu c_h \frac{\partial \sigma_{13}}{\partial x} - \mu c_\nu \frac{\partial \sigma_{33}}{\partial x} + \mu^4 \rho \frac{\partial^2 u}{\partial t^2} - f_1 \equiv Z_1 \\ \frac{\partial \sigma_{33}}{\partial z} &= -\mu \frac{\partial \sigma_{13}}{\partial x} + \mu^4 \rho \frac{\partial^2 w}{\partial t^2} - f_3 \equiv Z_2, \\ \sigma_{13}(x, z, t) &= \sigma_{33}(x, z, t) = 0, \quad z = 0, 1. \end{aligned} \quad (11)$$

The right-hand sides of Eqs. (11) are small — this is why the asymptotic expansions to construct the solution may be applied.

3 THE ASYMPTOTIC SOLUTION OF THE PROBLEM (11)

We assume that the plate is under action of the normal external pressure applied to the plane $z = 0$. Then in Eqs. (11)

$$f_1(x, z, t) = 0, \quad f_3(x, z, t) = F_3(t)\delta(z), \quad (12)$$

where $\delta(z)$ is the Dirac delta function, and $F_3(t)$ is independent of x .

We assume that for low-frequency transversal vibrations the deflection w is of the order of unity, and the differentiation in x and t does not change the orders of the unknown functions in Eqs. (11). Then the orders of the unknown functions are as follows:

$$w = O(1), \quad u = O(\mu), \quad \sigma_{13} = O(\mu^3), \quad \sigma_{33} = O(\mu^4), \quad (13)$$

with $F_3 = O(\mu^4)$.

We seek the solution of Eqs. (11) as a formal asymptotic series:

$$\begin{aligned} w(x, z, t, \mu) &= w^{(0)}(x, z, t) + \mu w^{(1)}(x, z, t) + \mu^2 w^{(2)}(x, z, t), \\ u(x, z, t, \mu) &= \mu \left(u^{(0)}(x, z, t) + \mu u^{(1)}(x, z, t) + \mu^2 u^{(2)}(x, z, t) \right), \\ \sigma_{13}(x, z, t, \mu) &= \mu^3 \left(\sigma_{13}^{(0)}(x, z, t) + \mu \sigma_{13}^{(1)}(x, z, t) + \mu^2 \sigma_{13}^{(2)}(x, z, t) \right), \\ \sigma_{33}(x, z, t, \mu) &= \mu^4 \left(\sigma_{33}^{(0)}(x, z, t) + \mu \sigma_{33}^{(1)}(x, z, t) + \mu^2 \sigma_{33}^{(2)}(x, z, t) \right). \end{aligned} \quad (14)$$

Further we shall content ourselves only with the first three terms of these series.

The integration in z of the two first equations (11) introduces arbitrary functions $w_n(x, t)$, $u_n(x, t)$, $n = 0, 1, 2$, and equations for these functions follow from the compatibility conditions of the rest two equations (11) and the boundary conditions $\sigma_{13} = \sigma_{13} = 0$ at $z = 0, 1$:

$$\langle Z_k(z) \rangle = 0, \quad k = 1, 2, \quad \langle Y \rangle = \int_0^1 Y(z) dz, \quad (15)$$

where $\langle Y \rangle$ is the averaging operator in the thickness direction. In particular, the relations $\langle c_0 \rangle = 1$ and $\langle \rho \rangle = 1$ are valid.

For shortness, we introduce the integral operator $\mathbf{I}(X) = \int_0^z X dz$. For any functions $X(z)$ and $Y(z)$, we have

$$\langle \mathbf{I}(X) \rangle = \langle X \rangle - \langle zX \rangle, \quad \langle X\mathbf{I}(Y) \rangle + \langle Y\mathbf{I}(X) \rangle = \langle X \rangle \langle Y \rangle. \quad (16)$$

The zero approximation. According to the first of equations (11) the function $w^{(0)}(x, z, t)$ does not depend on z , $w^{(0)}(x, z, t) = w_0(x, t)$. Then we find consequently

$$u^{(0)} = u_0(x, t) + z_* \frac{\partial w_0}{\partial x}, \quad z_* = a - z, \quad a = \langle c_0 z \rangle, \quad \sigma_{13}^{(0)} = -\mathbf{I}(c_0 z_*) \frac{\partial^3 w_0}{\partial x^3}, \quad (17)$$

$$D \frac{\partial^4 w_0}{\partial x^4} = -\frac{\partial^2 w_0}{\partial t^2} + F_3(t), \quad D = \langle \mathbf{I}(c_0 z_*) \rangle = \langle c_0 z_*^2 \rangle, \quad \frac{\partial^2 u_0}{\partial x^2} = 0, \quad (18)$$

$$\sigma_{33}^{(0)} = \mathbf{I}(\mathbf{I}(c_0 z_*)) \frac{\partial^4 w_0}{\partial x^4} + \mathbf{I}(\rho) \frac{\partial^2 w_0}{\partial t^2} - F_3(t), \quad (19)$$

where a is the neutral lower co-ordinate, D is the dimensionless bending stiffness, u_0 is the horizontal deflection of the neutral layer. Equation (18) may be obtained in the frames of the Kirchhoff–Love Hypotheses with the corresponding value of the equivalent longitudinal stiffness c_0 (see (6)).

The zero and the second approximations coincide with those obtained in [7] - [9] for a transversely isotropic plate, because at $c_h = c_1 = 0$ the both problems are described by the same Eqs. (11).

For the slanted anisotropy in the *first approximation* again we have $w^{(1)} = w_1(x, t)$, where w_1 are independent of z , and

$$u^{(1)} = u_1(x, t) + z_* \frac{\partial w_1}{\partial x} - \mathbf{I}(c_h) \frac{\partial u_0}{\partial x} - \mathbf{I}(c_h z_*) \frac{\partial^2 w_0}{\partial x^2}. \quad (20)$$

The arbitrary functions u_1 and w_1 may be found from the compatibility conditions (15); they satisfy equations

$$\begin{aligned} \frac{\partial^2 u_1}{\partial x^2} &= U_1 \frac{\partial^4 w_0}{\partial x^4} = \frac{U_1}{D} \left(F_3 - \frac{\partial^2 w_0}{\partial t^2} \right), \quad U_1 = \langle c_0 \mathbf{I}(c_h z_*) + c_h \mathbf{I}(c_0 z_*) \rangle, \\ D \frac{\partial^4 w_1}{\partial x^4} + \frac{\partial^2 w_1}{\partial t^2} &= 0. \end{aligned} \quad (21)$$

Thus, we find $\sigma_{13}^{(1)}$ and $\sigma_{33}^{(1)}$. For the orthotropic beam $U_1 = 0$, the first approximation identically vanishing.

In the second approximation

$$\begin{aligned} w^{(2)} &= w_2 - \mathbf{I}(c_\nu) \frac{\partial u_0}{\partial x} - \mathbf{I}(c_\nu z_*) \frac{\partial^2 w_0}{\partial x^2}, \\ u^{(2)} &= u_2 + z_* \frac{\partial w_2}{\partial x} - \mathbf{I}(c_h) \frac{\partial u_1}{\partial x} - \mathbf{I}(c_h z_*) \frac{\partial^2 w_1}{\partial x^2} + \\ &\quad (\mathbf{II}(c_\nu z_*) + \mathbf{I}(c_h \mathbf{I}(c_h z_*)) - \mathbf{I}(c_g \mathbf{I}(c_0 z_*))) \frac{\partial^3 w_0}{\partial x^3}. \end{aligned} \quad (22)$$

As before, we find equations for the functions u_2 and w_2 from Eqs. (15):

$$\begin{aligned} \frac{\partial^2 u_2}{\partial x^2} &= \frac{\partial^2 u_0}{\partial t^2} - \frac{U_1}{D} \frac{\partial^2 w_1}{\partial t^2} - \frac{U_2}{D} \frac{\partial^3 w_0}{\partial x \partial t^2}, \\ D \frac{\partial^4 w_2}{\partial x^4} &= -\frac{\partial^2 w_2}{\partial t^2} - \frac{W_2}{D} \frac{\partial^4 w_0}{\partial x^2 \partial t^2} + (a_\rho - a) \frac{\partial^3 u_0}{\partial t^2 \partial x}, \quad a_\rho = \langle z\rho \rangle. \end{aligned} \quad (23)$$

According to the expansions (14) and Eqs. (18), (21) and (22) we get the equations of second-order accuracy for the functions $u(x, t) = \mu u_0 + \mu^2 u_1 + \mu^3 u_2$ and $w(x, t) = w_0 + \mu w_1 + \mu^2 w_2$:

$$\frac{\partial^2 u}{\partial x^2} = \mu^2 \frac{\partial^2 u}{\partial t^2} - \mu^2 \frac{U_1}{D} \frac{\partial^2 w}{\partial t^2} - \mu^3 \frac{U_2}{D} \frac{\partial^3 w}{\partial x \partial t^2} + \mu^2 \frac{U_1}{D} F_3, \quad (24)$$

$$D \frac{\partial^4 w}{\partial x^4} = -\frac{\partial^2 w}{\partial t^2} + F_3 - \mu^2 \frac{W_2}{D} \frac{\partial^4 w}{\partial x^2 \partial t^2} + \mu(a_\rho - a) \frac{\partial^3 u}{\partial t^2 \partial x}. \quad (25)$$

Here $u(x, t)$ is the horizontal deflection of a point from the neutral line $z = a$, and $w(x, t)$ is the vertical deflection from the line $z = 0$.

In the zero approximation it is possible to study the longitudinal and bending vibrations separately. In the first approximation (for slanted anisotropy with $U_1 \neq 0$) the longitudinal vibrations depend on the bending ones. In the second approximation Eqs. (24) and (25) in the general case are connected with each other. But for $a_\rho = a$ Eq.(24) may be solved separately. Here $z = a_\rho$ is the co-ordinate of the beam center of gravity.

The coefficients U_2 and W_2 in Eqs. (24) and (25) are very complicated functions of beam parameters, and are presented in [10]. For a homogeneous material, we get

$$D = \frac{1}{12}, \quad a = \frac{1}{2}, \quad U_1 = \frac{c_h}{6}, \quad U_2 = \frac{c_h^2 + c_g - c_\nu}{24}, \quad W_2 = -\frac{1}{144} - \frac{3c_g - c_\nu + c_h^2}{360}. \quad (26)$$

Calculations [10] show that Eqs. (24), (25) give a more exact result compared with the zero and with the first approximations especially in the cases when the orders of elastic modules in (3) differ from each other.

4 THE BOUNDARY CONDITIONS AND THE NATURAL FREQUENCIES

Let the boundary conditions

$$w(x, z) = 0, \quad \sigma_{11}(x, z) = 0 \quad \text{at all} \quad z \in [0, 1] \quad \text{and} \quad x = 0, 1 \quad (27)$$

be given. Replacing the condition $\sigma_{11} = 0$ by the two conditions $\langle \sigma_{11} \rangle = 0$ and $\langle z_* \sigma_{11} \rangle = 0$ we obtain the conditions

$$\frac{\partial u}{\partial x} = 0, \quad w = 0, \quad \frac{\partial^2 w}{\partial x^2} = 0 \quad \text{at} \quad x = 0, 1. \quad (28)$$

Dividing variables,

$$u(x, t) = u(x)e^{i\omega t}, \quad w(x, t) = w(x)e^{i\omega t}, \quad F_3(t) = F_3^0 e^{i\omega t}, \quad i = \sqrt{-1} \quad (29)$$

Equations (24), (25) read as:

$$\frac{d^2 u}{dx^2} + \mu^2 \omega^2 u = \mu^2 \omega^2 b_1 w - \mu^3 \omega^2 b_2 \frac{dw}{dx} + \mu^2 b_1 F_3^0, \quad (30)$$

$$D \frac{d^4 w}{dx^4} - \omega^2 w = F_3^0 - \mu^2 \omega^2 b_3 \frac{d^2 w}{dx^2} - \mu \omega^2 b_4 \frac{dw}{dx} \quad (31)$$

with

$$b_1 = \frac{U_1}{D}, \quad b_2 = -\frac{U_2}{D}, \quad b_3 = -\frac{W_2}{D} > 0, \quad b_4 = a_\rho - a.$$

Here the coefficients b_1 , b_2 , b_3 , and b_4 describe the effects of slanted anisotropy, of non-classic transversal (mainly, shear) deformations, and of the difference between the neutral layer and the center of gravity position.

At $F_3^0 = 0$ equations (30), (31), and (28) describe the boundary-value problem for the lower part of the free vibrations spectrum. With $b_4 = 0$ Eq. (30) and (31) give the bending part of the spectrum

$$\begin{aligned} w(x) &= w_n(x) = \sin n\pi x, \quad \omega_n^2 = \frac{D(n\pi)^4}{1 + \mu^2(n\pi)^2 b_3}, \\ u_n(x) &= \frac{\mu^2 \omega_n^2 b_1 (\sin n\pi x - v_n(x)) - \mu^3 \omega_n^2 b_2 n\pi \cos n\pi x}{p_n^2 - (n\pi)^2}, \quad n = 1, 2, \dots, \\ v_n(x) &= n\pi p_n^{-1} (\cos p_n x (\cot p_n - (-1)^n) + \sin p_n x), \quad p_n = \mu \omega_n, \end{aligned} \quad (32)$$

where $v_n(x)$ is the solution to the homogeneous equation (30). From Eq. (32) it follows that the bending vibrations are accompanied by small longitudinal deflections u , and in the case of slanted anisotropy ($b_1 \neq 0$) the order of u is larger. With $b_4 \neq 0$ the more complicated formulas close to (32) have place.

If $p_n \approx n\pi$ the special consideration is necessary. In this case the “internal resonance” appears at which the bending frequency is close to the longitudinal one. For small enough numbers n (such that $(\mu n\pi)^2(D - b_3) < 1$) the internal resonance does not appear.

5 THE FORCED HARMONIC AND RANDOM VIBRATIONS

The forced stable vibrations under the action of the harmonic excitation $F_3(t) = F_3^0 e^{i\omega t}$ are described by Eqs. (30), (31), and (28). The solution may be written as:

$$u(x, t, \omega) = s_u(x, \omega)e^{i\omega t}, \quad w(x, t, \omega) = s_w(x, \omega)e^{i\omega t}. \quad (33)$$

The functions $s_u(x, \omega)$ and $s_w(x, \omega)$ go off to infinity at $\omega \rightarrow \omega_n$ where ω_n are the natural frequencies. To get finite amplitudes it is necessary to place constraints.

The simplest way consists in the replacing the elastic material by a visco-elastic one with the complex modules. If we assume that all modules E_{jk} , G_{13} , H_{ji} in the matrix (3) are changed

by $(1 + i\gamma)E_{jk}$, $(1 + i\gamma)G_{13}$, $(1 + i\gamma)H_j$ with the same small dimensionless coefficient γ , then Eqs. (30), (31) read as:

$$\begin{aligned} (1 + i\gamma)\frac{d^2u}{dx^2} + \mu^2\omega^2u &= \mu^2\omega^2b_1w - \mu^3\omega^2b_2\frac{dw}{dx} + \mu^2b_1F_3^0, \\ (1 + i\gamma)D\frac{d^4w}{dx^4} - \omega^2w &= F_3^0 - \mu^2\omega^2b_3\frac{d^2w}{dx^2} - \mu\omega^2b_4\frac{dw}{dx}. \end{aligned} \quad (34)$$

Instead of Eqs. (33) we get the bounded solution

$$u(x, t, \omega) = \mathbf{Re}(s_u(x, \omega)e^{i\omega t}), \quad w(x, t, \omega) = \mathbf{Re}(s_w(x, \omega)e^{i\omega t}), \quad (35)$$

where s_u and s_w are solutions of Eqs. (34).

Let now $F_3(t)$ be the random stationary process with spectral density $S_F(\omega)$. Then for a fixed x the processes $u(x, t)$, $w(x, t)$ are also stationary with spectral densities

$$S_u(x, \omega) = |s_u(x, \omega)|^2 S_F(\omega), \quad S_w(x, \omega) = |s_w(x, \omega)|^2 S_F(\omega) \quad (36)$$

with the same s_u and s_w . There are various characteristics of the processes $u(x, t)$, $w(x, t)$. For example, the root-mean-squares

$$\sigma_u^2(x) = \int_{-\infty}^{\infty} S_u(x, \omega) d\omega, \quad \sigma_w^2(x) = \int_{-\infty}^{\infty} S_w(x, \omega) d\omega. \quad (37)$$

6 NUMERICAL EXAMPLE

Consider a soft isotropic homogeneous material (matrix) uniformly reinforced by a system of hard straight fibres, at angle α with the x -axis. After averaging we get a material with slanted anisotropy (Fig. 2).

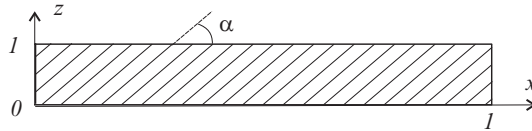


Figure 2: A reinforced beam.

For the elastic modules in (3) the following relations are valid [11]:

$$\begin{aligned} E_{11} &= \frac{E(1 - \delta)}{1 - \nu^2} + E_n\delta \cos^4 \alpha, & E_{13} &= \frac{E\nu(1 - \delta)}{1 - \nu^2} + E_n\delta \sin^2 \alpha \cos^2 \alpha, \\ E_{33} &= \frac{E(1 - \delta)}{1 - \nu^2} + E_n\delta \sin^4 \alpha, & G_{13} &= \frac{E(1 - \delta)}{2(1 + \nu)} + E_n\delta \sin^2 \alpha \cos^2 \alpha, \\ H_1 &= E_n\delta \sin \alpha \cos^3 \alpha, & H_3 &= E_n\delta \sin^2 \alpha \cos \alpha, \end{aligned} \quad (38)$$

where E and ν are, respectively, the Young modulus and the Poisson ratio of a matrix, E_n is the Young modulus of fibers, δ is the part of volume occupied by fibers.

We accept the following dimensionless parameters:

$$\nu = 0.3, \quad E_n/E = 1000, \quad \delta = 0.1, \quad \rho = 1, \quad \alpha = \pi/18, \quad \mu = 0.05, \quad \gamma = 0.1. \quad (39)$$

The material is homogeneous, therefore $b_4 = 0$, and from Eqs. (6), (8), (26) we find the coefficients in Eqs. (30), (31):

$$b_1 = 9.95, \quad b_2 = -13.82, \quad b_3 = 1.24. \quad (40)$$

Equation (32) gives the first bending frequencies

$$\omega_1 = 2.81, \quad \omega_2 = 10.76, \quad \omega_3 = 22.71, \quad \omega_4 = 32.35, \quad \omega_5 = 53.62, \dots$$

The even modes are not excited in the studied case when F_3 does not depend on x .

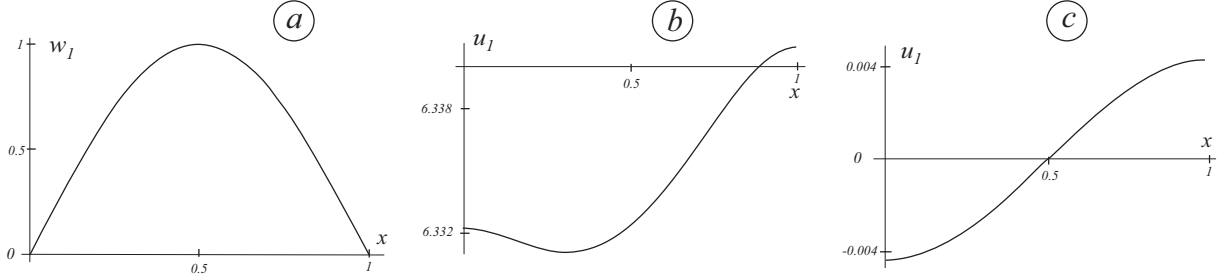


Figure 3: Eigen-functions $w_1(x)$, $u_1(x)$, and $u_1(x)$ at $b_1 = 0$.

Let us discuss the first eigen-functions (32). The function $w_1(x)$ is an ordinary sine (see Fig. 3(a)). The function u_1 is a solution of Eq. (30) at $\omega = \omega_1$, $w = \sin \pi x$ and $F_3^0 = 0$. To satisfy boundary conditions

$$\frac{du}{dx} = 0 \quad \text{at} \quad x = 0, \quad x = 1 \quad (41)$$

it is necessary to add a solution $v_1(x)$ of the homogeneous equation $\frac{d^2 u}{dx^2} + \mu^2 \omega_1^2 u = 0$. As a result we get the function (32) $u_1(x)$ which is large compared with $w_1(x)$ and almost constant (see Fig. 3(b)). If we put $b_1 = 0$ (an orthotropic material) then $u_1(x)$ becomes very small (see Fig. 3(c)). Also the function $u_1(x)$ is small if one or two conditions (41) be replaced by $u = 0$.

The functions $s_w(x, \omega)$ and $s_u(x, \omega)$ may be written in terms of the Fourier expansions:

$$\begin{aligned} s_w(x, \omega) &= \sum_{n=1,3,\dots} \frac{4 \sin n\pi x}{Dn^5 \pi^4 (\omega_n^2 (1 + i\gamma) - \omega^2)}, \\ s_u(x, \omega) &= \sum_{n=1,3,\dots} \frac{4 (\mu^2 \omega_n^2 b_1 (\sin n\pi x - v_n(x)) - \mu^3 \omega_n^2 b_2 n\pi \cos n\pi x)}{Dn^5 \pi^4 (\omega_n^2 (1 + i\gamma) - \omega^2) ((1 + i\gamma) p_n^2 - (n\pi)^2)}. \end{aligned} \quad (42)$$

Only the first terms of these series are essential because the second terms are 3^5 times smaller.

We consider a random stationary excitation $F(t)$ with unit dispersion and spectral density

$$S_F(\omega) = \frac{1}{\pi} \frac{2\alpha(\alpha^2 + \beta^2)}{(\omega^2 - \alpha^2 - \beta^2)^2 + 4\alpha^2 \omega^2}, \quad \alpha = 0.2\beta. \quad (43)$$

The function $S_F(\omega)$ has a maximum at $\omega \approx \beta$. At $\beta = 1$ the function $S_F(\omega)$ is shown in Fig. 4(a). In Fig. 4(b) and in Fig. 4(c) the root-mean-squares $\sigma_u(\beta)$ and $\sigma_w(\beta)$ of the deflections of the point $x = 1/2$ calculated by Eqs. (36) and (37) are shown.

The functions $\sigma_u(\beta)$ and $\sigma_w(\beta)$ have a maximum at β close to $\omega_1 = 2.81$ namely a resonance at random excitation also has place. As for the eigen-functions, the inequality $\sigma_u(\beta) > \sigma_w(\beta)$ is valid.

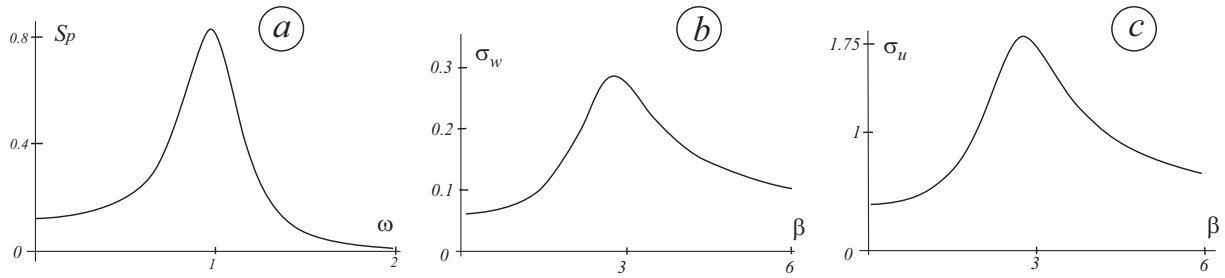


Figure 4: The spectral density of excitation $S_F(\omega)$ at $\beta = 1$, and the root-mean-squares $\sigma_u(\beta)$ and $\sigma_w(\beta)$ of the deflections of the point $x = 1/2$.

7 CONCLUSIONS

Vibrations of a thin elastic beam-strip made of an anisotropic material are studied. The 1D model of second-order accuracy is delivered. A special attention is paid to the slanted anisotropy with 6 elastic modules. The main peculiarity is that in the case of slanted anisotropy the beam with simply supported edges has very large horizontal deflections at a vertical excitation.

The work was supported by the Russian Foundation of Basic Researches, grants nos. 16.01.00580-a, 14.01.271, 16.51.52025 MHT-a.

REFERENCES

- [1] L.A. Agalovyan *Asymptotic theory of anisotropic plates and shells*. Nauka, Moscow, 1997. [in Russian].
- [2] B.A. Zimin, I.S. Zorin On the stability of a flat shape balance inhomogeneous anisotropic elastic plates and rods. *Vestnik St.Petersburg Univ. Mathematics*. 1, 2016.
- [3] P.E. Tovstik Two-dimensional models of plates made of an anisotropic material. *Doklady Physics*, **54**(4), 205–209, 2009.
- [4] P.E. Tovstik, T.P. Tovstik Two-dimensional models of shells made of an anisotropic material. *Acta mechanica*, **225**(3), 647–661. 2014.
- [5] P.E. Tovstik, T.P. Tovstik Two-dimensional model of plate made of anisotropic inhomogeneous material. *International Conference on Numerical Analysis and Applied Mathematics 2014 (ICNAAM-2014)* **1648**, 300011, 2014.
- [6] R. Kienzler, P. Shneider Comparison of various linear plate theories in the light of a consistent second order approximation. *Shell Structures: Theory and Applications. Proc. 10th SSTA 2013 Conf.* **3**, 109–112, 2014.
- [7] P.E. Tovstik, T.P. Tovstik A thin-plate bending equation of second-order accuracy. *Doklady Physics*, **59**(8), 389–392, 2014.
- [8] N.F. Morozov, P.E. Tovstik, T.P. Tovstik Generalized Timoshenko–Reissner models for multilayered plate. *Mechanics of Solids, Izv. RAS*, 5. 2016.

- [9] P.E. Tovstik, T.P. Tovstik Generalized Timoshenko–Reissner models for beams and plates, strongly heterogeneous in the thickness direction. *ZAMM*, DOI 10.1002/zamm.201600052, 2016.
- [10] P.E. Tovstik, T.P. Tovstik, N.V. Naumova Long-wave vibrations and waves in anisotropic beam. *Vestnik St.Petersburg Univ. Mathematics*, 2, 2017.
- [11] P.E. Tovstik, T.P. Tovstik Two-dimensional models of anisotropic plates. *Tr. seminara "Computer methods in Continuum mechanics"*. *St.Petersburg Univ.Press*, 4–16, 2008. [in Russian]